

SAHYADRI®

SECO



PRODUCTS CATALOGUE

SAHYADRI ELECTRO CONTROLS (I) PVT. LTD.


#10, VINAY COMPLEX, 1ST CROSS, RAJGOPALNAGAR MAIN ROAD, GANAPATHINAGAR,
III PHASE PEENYA IND AREA, BANGALORE - 560 058.

TELE: 080 - 4149 2637 E-mail: sales@secoindia.co.in ♦ Website: www.secoindia.co.in



Annunciator

Windows available : 4 to 64 windows
Window size: 34 x 74 mm (Big window)
Aux. supply: 20 to 150V DC & 75 to 275V DC/AC
With RS 485 communication
With DC fail indication & Relay output
With AC Fail Indication

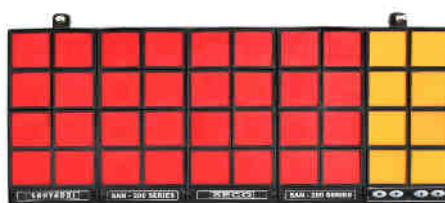

Annunciator

Windows available : 4 to 64 windows
Window size: 34 x 37 mm (small window)
Aux. supply: 20 to 150V DC & 75 to 275V DC/AC
With RS 485 communication
With DC fail indication & Relay output
With AC Fail Indication




Annunciator with Inbuilt Hooter Speaker invisible

Windows available : 4 to 64 windows
Window size: 34 x 37 mm (small window)
Window size: 34 x 74 mm (Big window)
Aux. supply: 20 to 150V DC & 75 to 275V DC/AC
With RS 485 communication
With DC fail indication & Relay output
With AC Fail Indication



Annunciator with Inbuilt Hooter speaker visible

Windows available : 4 to 64 windows
Window size: 34 x 37 mm (small window)
Window size: 34 x 74 mm (Big window)
Aux. supply: 20 to 150V DC & 75 to 275V DC/AC
With RS 485 communication
With DC fail indication & Relay output
With AC Fail Indication



Annunciator—96 sq. mm

Windows available : 4 & 8 windows
Aux. supply: 20 to 150V DC & 75 to 275V DC/AC
With Trip & Non Trip selection
With NO/NC input selection



Annunciator—96 sq. mm

Windows available : 4 & 8 windows
Aux. supply: 20 to 150V DC & 75 to 275V DC/AC
With Trip & Non Trip selection
With NO/NC input selection



ELECTRONIC HOOTER

Universal input: 20 to 275V DC & 65 to 275V AC
Panel cutout: 92 x 92 mm
Front: 96 x 96 mm



ELECTRONIC BUZZER

Universal input: 20 to 275V DC & 65 to 275V AC
Panel cutout: 92 x 92 mm
Front: 96 x 96 mm



ELECTRONIC BELL

Universal input: 20 to 275V DC & 65 to 275V AC
Panel cutout: 92 x 92 mm
Front: 96 x 96 mm



ELECTRONIC HOOTER WITH ACCEPT PB

Universal input: 20 to 275V DC & 65 to 275V AC
Panel cutout: 92 x 92 mm
Front: 96 x 96 mm



MULTITONE ALARM—2DC + 1AC

Universal input: 20 to 275V DC & 65 to 275V AC
Panel cutout: 92 x 92 mm
Front: 96 x 96 mm



MULTITONE ALARM—3DC + 1AC

Universal input: 20 to 275V DC & 65 to 275V AC
Panel cutout: 92 x 92 mm
Front: 96 x 96 mm



POWERPACK—BATTERY BACKUP

INPUT: 110/230V AC
OUTPUT: 24, 30, 110 & 220V DC
LOAD: 100W
BATTERY USED : 7AH—EXIDE MAKE



POWERPACK—BATTERY BACKUP

INPUT: 110/230V AC
OUTPUT: 24 V DC
LOAD: 200W & 300W
BATTERY USED : 18AH—EXIDE MAKE



AVR :- AUTOMATIC VOLTAGE REGULATOR

AUX SUPPLY: 230V AC
RATED VOLTAGE: 110V AC



TPI: TAP POSITION INDICATOR

SUITABLE FOR : 17, 21, 25 & 35 TAPS
AUX SUPPLY: 230V AC
INPUT RESISTOR: 1K OHMS



ELR:- EARTH LEAKAGE RELAY WITH CBCT

AUX. SUPPLY: 230V AC
SETTING 0.5 TO 8 AMPS
CBCT: 100, 150, 200, 250 & 300 mm




EARTH FAULT RELAY

AUX. SUPPLY: 230V AC
RANGE: 20 TO 80 %
CURRENT: SELECTABLE 1A OR 5 A



DC UNDER VOLTAGE AND OVER VOLTAGE RELAY
AUX. SUPPLY: 230V AC
RATED VOLTAGE:
24, 30, 48, 110 & 220V DC

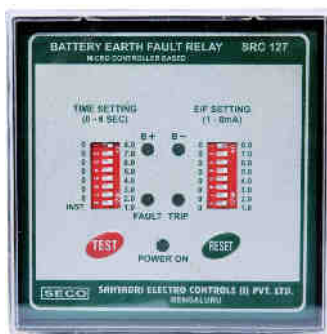

BATTERY EARTH FAULT RELAY
AUX. SUPPLY: 230V AC
BATTERY VOLTAGE: 24, 30, 48, 110 & 220V DC



TRIP CIRCUIT SUPERVISION RELAY
AUX. SUPPLY: 24, 30, 48, 110 & 220V DC
SUITABLE FOR : 3 CABLE MODE



DC FAIL RELAY WITH ALARM
AUX. SUPPLY: 230V AC
RATED VOLTAGE: 24, 30, 48, 110 & 220V DC
SOUND OUTPUT: 90 Db
With ACCEPT PB & TEST PB



DC FAIL RELAY WITH WINDOW
AUX. SUPPLY: 230V AC
RATED VOLTAGE: 24, 30, 48, 110 & 220V DC
With ACCEPT PB & TEST PB



ACCL: AUTOMATIC CHANGE OVER AND CURRENT LIMITER
SUITABLE: SINGLE PHASE
WITH DG CURRENT PROTECTION
RATED CURRENT: 1A TO 16A



ACCL: AUTOMATIC CHANGE OVER AND CURRENT LIMITER
SUITABLE: 3 PHASE
WITH UNDER & OVER VOLTAGE PROTECTION
RATED CURRENT: 25/ 25, 40/ 40, 63/ 63, 100/ 100, 125/ 125A



COUNTER—4 CHANNEL
DISPLAY: RX & TX
POTENTIAL FREE INPUT



COUNTER—8 CHANNEL
DISPLAY: RX & TX
WITH VOLTAGE INPUT: 110V & 220V DC



INDICATING LAMPS
COLOUR: RED, GREEN, AMBER, YELLOW, BLUE & WHITE
VOLTAGE: 12, 24, 30, 48, 11, 220 & 250V DC
63.5, 110 & 230V AC
UNIVERSAL VOLTAGE: 20 TO 275V DC/AC



PUSH BUTTONS WITH ELEMENTS
COLOUR: RED, BLACK, GREEN, YELLOW & BLUE
ELEMENTS: NO & NC